



Supplied with\* Calibration certificate

# Thermocouple thermometers

## TK 100 - TK 102

*New*



### Functions


- Temperature
- Selection of units
- HOLD function
- Simplified mode function
- Minimum and maximum values
- Adjustable backlight
- Delta T (TK 102)
- Adjustable automatic shut-off

### Technical features


Measuring elements.....	Thermocouple K, J, T or S class 1
Display.....	2 lines, LCD technology. Sizes 50 x 34.9 mm. 1 line of 5 digits with 7 segments (value) 1 line of 5 digits with 16 segments (unit)
Housing.....	Shock-proof made of ABS, IP54 protection or IP67 with CEP 150 protective cover
Keypad.....	Metal-coated with 5 keys
Conformity.....	electromagnetical compatibility (NF EN 61326-1 guideline)
Power supply.....	1 alkaline battery 9V 6LR61
Operating temperature.....	from 0 to 50°C
Storage temperature.....	from -20 to +80°C
Auto shut-off.....	adjustable from 0 to 120 min
Weight.....	190g
Languages.....	French, english



TK 100 - 1 channel



TK 102 - 2 channels



\*except class 100S

## Specifications


	Measuring units	Measuring ranges	Accuracy*	Resolutions
<b>THERMOCOUPLE PROBES (see related datasheet)</b>				
Thermocouple K	°C, °F	from -200 to 1300°C	±1.1°C or ±0.4% of reading**	0.1 °C
Thermocouple J	°C, °F	from -100 to 750°C	±0.8°C or ±0.4% of reading**	0.1 °C
Thermocouple T	°C, °F	from -200 to 400°C	±0.5°C or ±0.4% of reading**	0.1 °C
Thermocouple S	°C, °F	from 0 to 1760 °C	±1°C or ±0.4% of reading**	0.5 °C

\*All accuracies indicated in this document were stated in laboratory conditions and can be guaranteed for measurements carried out in the same conditions, or carried out with required compensation.  
\*\*the accuracy is expressed either by a deviation in °C, or by a percentage of the value concerned. Only the bigger value is considered.

## Working principle


According to the Seebeck effect, when two wires composed of different metals are joined at both ends, an electric circuit is formed. The voltage increases with temperature.

I.E : Thermocouple K




## Dimensions


• Top view



• Front view

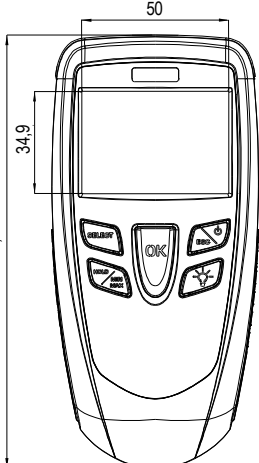

• Side view



## Supplied with ...

● Included ○ Optional

DESCRIPTION	TK 100	TK 102
Thermocouple probes	○	○
Protective cover IP67	○	○
Calibration certificate*	●	●
Transport case	●	●

\*except class 100S








Large choice of temperature probes (See related datasheet) :

- ambient
- contact
- penetration
- food industry penetration
- general use
- Etc...



## Accessories (See related datasheet)

<b>CE 100</b> Protective cover with magnet and holding system. 	<b>CEP 100</b> Protective cover against water spray. 
<b>GST</b> Silicone heat-conductive grease for temperature probes. 	<b>RTS</b> Telescopic extension (for probe), 1m long and bent at 90°. 
<b>BN (See related data sheet)</b> Black ball Ø 150mm with junction for temperature probe Ø 4,5mm. Further dimensions available. 	

## Warranty period

Instruments have 1-year guarantee for any manufacturing defect (return to our After-Sales Service required for appraisal).

[www.kimo.fr](http://www.kimo.fr)

Distributed by :



EXPORT DEPARTMENT

Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29

e-mail : [export@kimo.fr](mailto:export@kimo.fr)